


This listing of claims will replace all prior versions and listings of claims in the application.

**Listing of Claims:**

1. (cancelled)

2. (previously presented) The composition of claim 23, wherein said cycloaliphatic polyester has recurring units of the formula:




wherein R¹ is an alkyl or cycloaliphatic radical having from 2 to 12 carbon atoms, and R² is an alkyl or a cycloaliphatic radical, provided that at least one of R¹ or R² is a cycloalkyl group.

3. (original) The composition of claim 2, wherein R¹ and R² is each a cyclohexylidene.

4. (previously presented) The composition of claim 23, wherein said hindered amine light stabilizer comprises a substituted piperidine moiety or an oligomer substituted piperidine moiety.


5. (currently amended) The composition of claim 4, wherein said hindered amine light stabilizer is a 4-piperidinol derivative having the general formula




wherein X is oxygen; Y is hydrogen, hydroxyalkyl, aminoalkyl, or alkyl substituted by both hydroxyl and amino groups, where the alkyl moiety when present in Y has up to 20 carbon atoms; R⁶ and R⁷ are each independently selected from the group consisting of hydrogen, an alkyl group, an alkenyl group, or an arylalkyl group; R⁸, R⁹, R¹⁰, and R¹¹ are each independently selected from the group consisting of an alkyl group having 1 to 6 carbon atoms, phenyl, an arylalkyl group, an aromatic heterocyclic group having 5 or 6 carbon atoms and containing an oxygen, sulphur or nitrogen atom, or R⁸, R⁹, R¹⁰, and R¹¹ respectively, together or with the carbon atom to which they are attached are a C₅ to C₁₂ cycloalkyl group; Z is an oxy radical, an alkyl

group, an alkenyl group, an alkoxyalkyl group, an arylalkyl group that is unsubstituted or which has one or more substituents in its aryl moiety.


6. (currently amended) The composition of claim 23, wherein said hindered amine light stabilizer has the formula:



wherein n is on average greater than 9, and less than 12, by the formula:



wherein n is on average greater than 4, and less than 7, by the formula:




or a mixture comprising at least one of the foregoing hindered amine light stabilizers.


7. (currently amended) The composition of claim 3, wherein said hindered amine light stabilizer is present in an amount greater than 0.1% by weight, and less than 10% by weight of the total weight of said upper layer.

8. (previously presented) The composition of claim 23, wherein said low volatility hydroxyphenyl-triazine or -pyrimidine UV absorber contains a 2,4,6-trisaryl-1,3,5-triazine moiety and a free hydroxyl group, or contains a 2,4,6-trisaryl-1,3-pyrimidine moiety and a free hydroxyl group.

9. (previously presented) The composition of claim 23, wherein said low volatility hydroxyphenyl-triazine or -pyrimidine UV absorber has the formula:



or the formula:

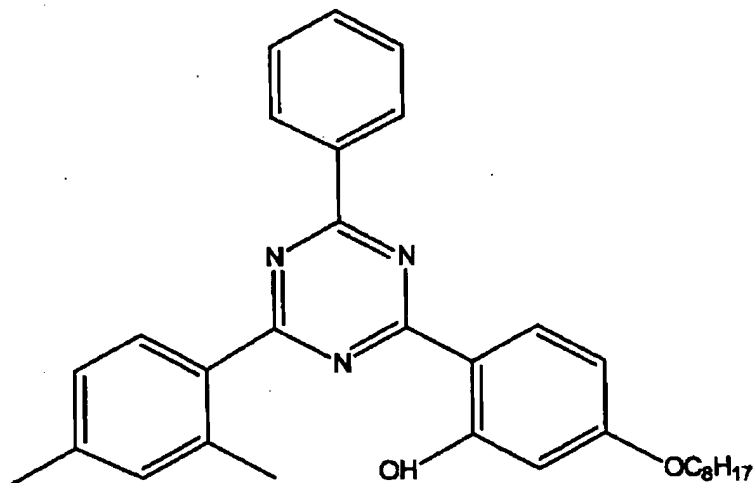

10. (currently amended) The composition of claim 8, wherein said low volatility hydroxyphenyl-triazine or -pyrimidine UV absorber is present at a concentration greater than or equal to 0.01% by weight, and less than or equal to 10% by weight of said upper layer.

11. (previously presented) The composition of claim 23, wherein the substrate comprises polycarbonate.
12. (previously presented) The composition of claim 23, wherein the substrate is in the form of a film.
13. (currently amended) The composition of claim 23 having a gloss measured at an angle of 60 degrees of more than 60%, a change in gloss of less than 20% after 3000 hours of weathering according to the ISO4892-2A protocol, and a change in color of less than 3 after 3000 hours of weathering according to the ISO4892-2A protocol.
14. (currently amended) The composition of claim 13 wherein the gloss is greater than 70%, the change in gloss is less than 15%, and the change in color is less than 2.
15. (currently amended) The composition of claim 13, wherein the gloss is greater than 80%, the change in gloss is less than 10%, and the change in color is less than 1.
16. (currently amended) The composition of claim 23 having a gloss measured at an angle of 60 degrees of more than 75%, a change in gloss of less than 15% after heat aging at 80°C for three months, and a change in color of less than 2 after heat aging at 80°C for three months.
17. (currently amended) The composition of claim 16 wherein the gloss is greater than 80%, the change in gloss is less than 10%, and the change in color is less than 1.5.
18. (currently amended) The composition of claim 13, wherein the gloss is greater than 85%, the change in gloss is less than 5%, and the change in color is less than 1.
19. (cancelled)
20. (previously presented) An article comprising the composition of claim 23.
21. (original) An article comprising the composition of claim 12.
22. (currently amended) A method for the manufacture of a multilayer article, comprising blow molding the composition of claim 23.
23. (previously presented) A layered composition comprising:  
an upper layer consisting essentially of:  
(a) a polymer system consisting essentially of a cycloaliphatic polyester; and  
(b) 0.01 to 10% by weight of hydroxyphenyl triazine or hydroxyphenyl pyrimidine; and  
(c) 0.01 to 10% by weight of a hindered amine light stabilizer;

an intermediate layer consisting essentially of a polymer system of a cycloaliphatic polyester and optionally one or more materials selected from the group consisting of TiO<sub>2</sub>, dyes, pigments and special effects additives; and  
a polymeric substrate, wherein the intermediate layer is disposed between and in intimate contact with the upper layer and the polymeric substrate.

24. (new) The composition of claim 23, wherein the cycloaliphatic polyester is poly-1,4-cyclohexane-dimethanol-1,4-cyclohexanedicarboxylate.